vantara™

Installation Guide

Kitchen Faucet // Single Hole

PULL-DOWN | NON PULL-DOWN

Before You Start

- Turn off the hot and cold water supply.
- Clean the sink area.
- Make sure the mounting hole is Ø33–35 mm.
- Handle the faucet carefully to avoid scratches.

Installation Steps

1. Insert the faucet hoses through the sink hole.
2. Place the washer, gasket, and mounting nut from underneath.
   Tighten the screws to secure the faucet.
3. Connect the hot and cold water hoses to the correct valves.
4. Check all connections for leaks.

For Pull-Down models

5. Push the spray hose into the quick connector.
   Attach the counterweight to the spray hose.
6. Turn on the water and run for 15 seconds.
7. Connect the spray head to the faucet.
   Check that the spray head pulls out and returns properly.
8. Check all connections for leaks.

Use & Care

- Use the faucet gently.
- Wipe dry after use with a soft cloth.
- Clean with mild soap and water only.
- Do not use acidic cleaners, bleach, powders, or rough brushes.
- Shut off the faucet if not used for a long time to avoid freezing.

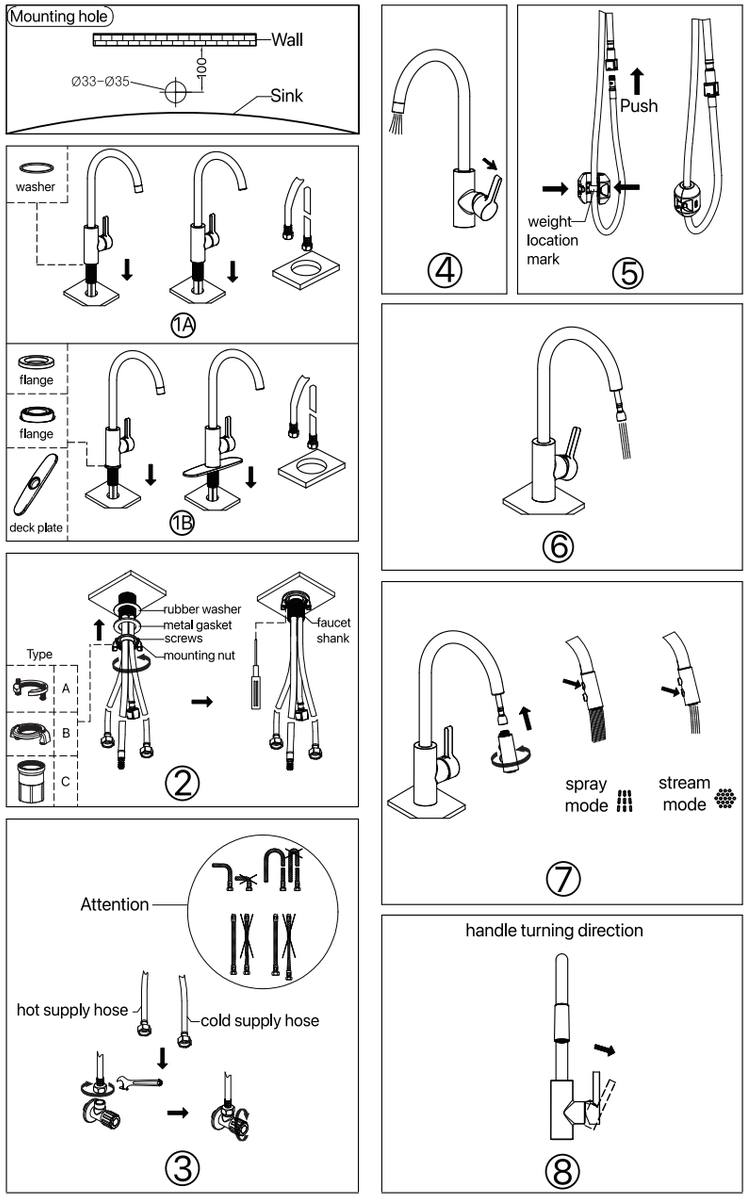

Note: Images are for reference only. / Installation may vary slightly by model.
All information is subject to change without notice. Please contact us to confirm accuracy.